

# LED EXTRUSIONS





LED  
STRIP  
PROFILE




## LED STRIP EXTRUSIONS

- Various mounting options - (surface, corners, recessed, suspended, flange, inground)
- Polycarbonate Diffused lensing
- Thermal management with heat dissipation
- Field cuttable to size
- Field installed
- Customizable with your selection of LED Strip
- High-quality anodized aluminum

### Mini Surface Mounting Series


(Unit: mm)

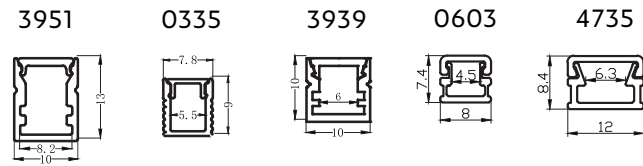

Part # AL-MSM-xxxx

### Mini Recessed Mounting Series


(Unit: mm)

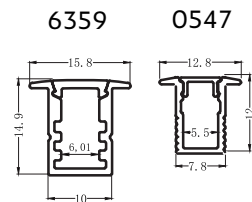

Part # AL-MRM-xxxx

### Regular Surface Mounting Series


(Unit: mm)

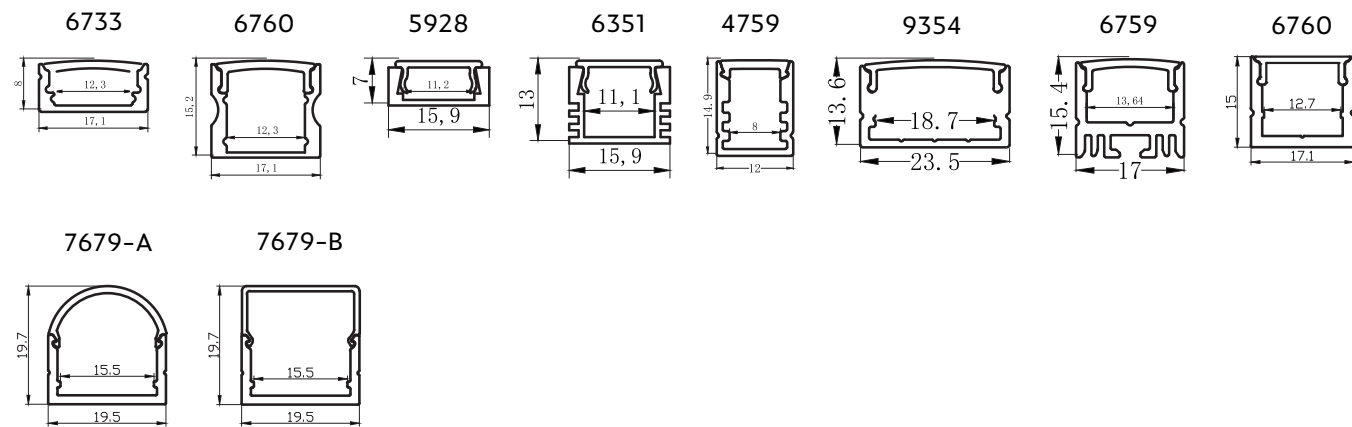

Part # AL-RSM-xxxx

### Regular Recessed Mounting Series


(Unit: mm)

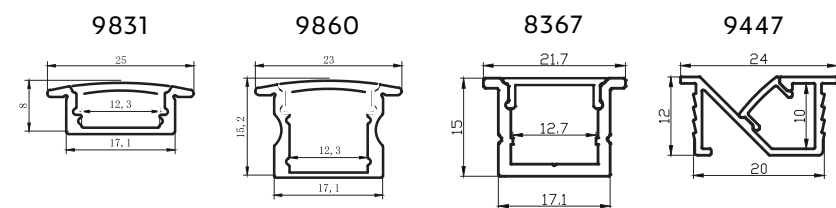

Part # AL-RRM-xxxx

### Corner Mounting Series


(Unit: mm)

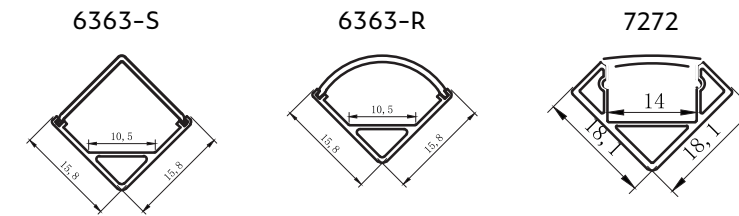

Part # AL-CM-xxxx

### Regular Suspension Series


(Unit: mm)

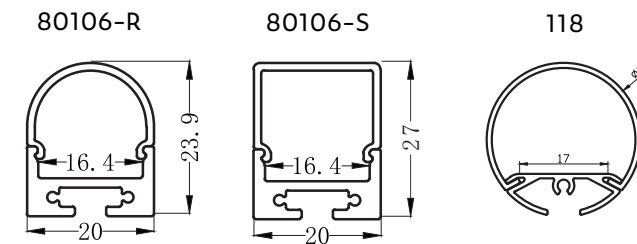

Part # AL-RS-xxxx

### In Ground Series


(Unit: mm)



Part # AL-IG-xxxx

### Wall Washer Series


(Unit: mm)



Part # AL-WW-xxxx

## Decorative Series


(Unit: mm)

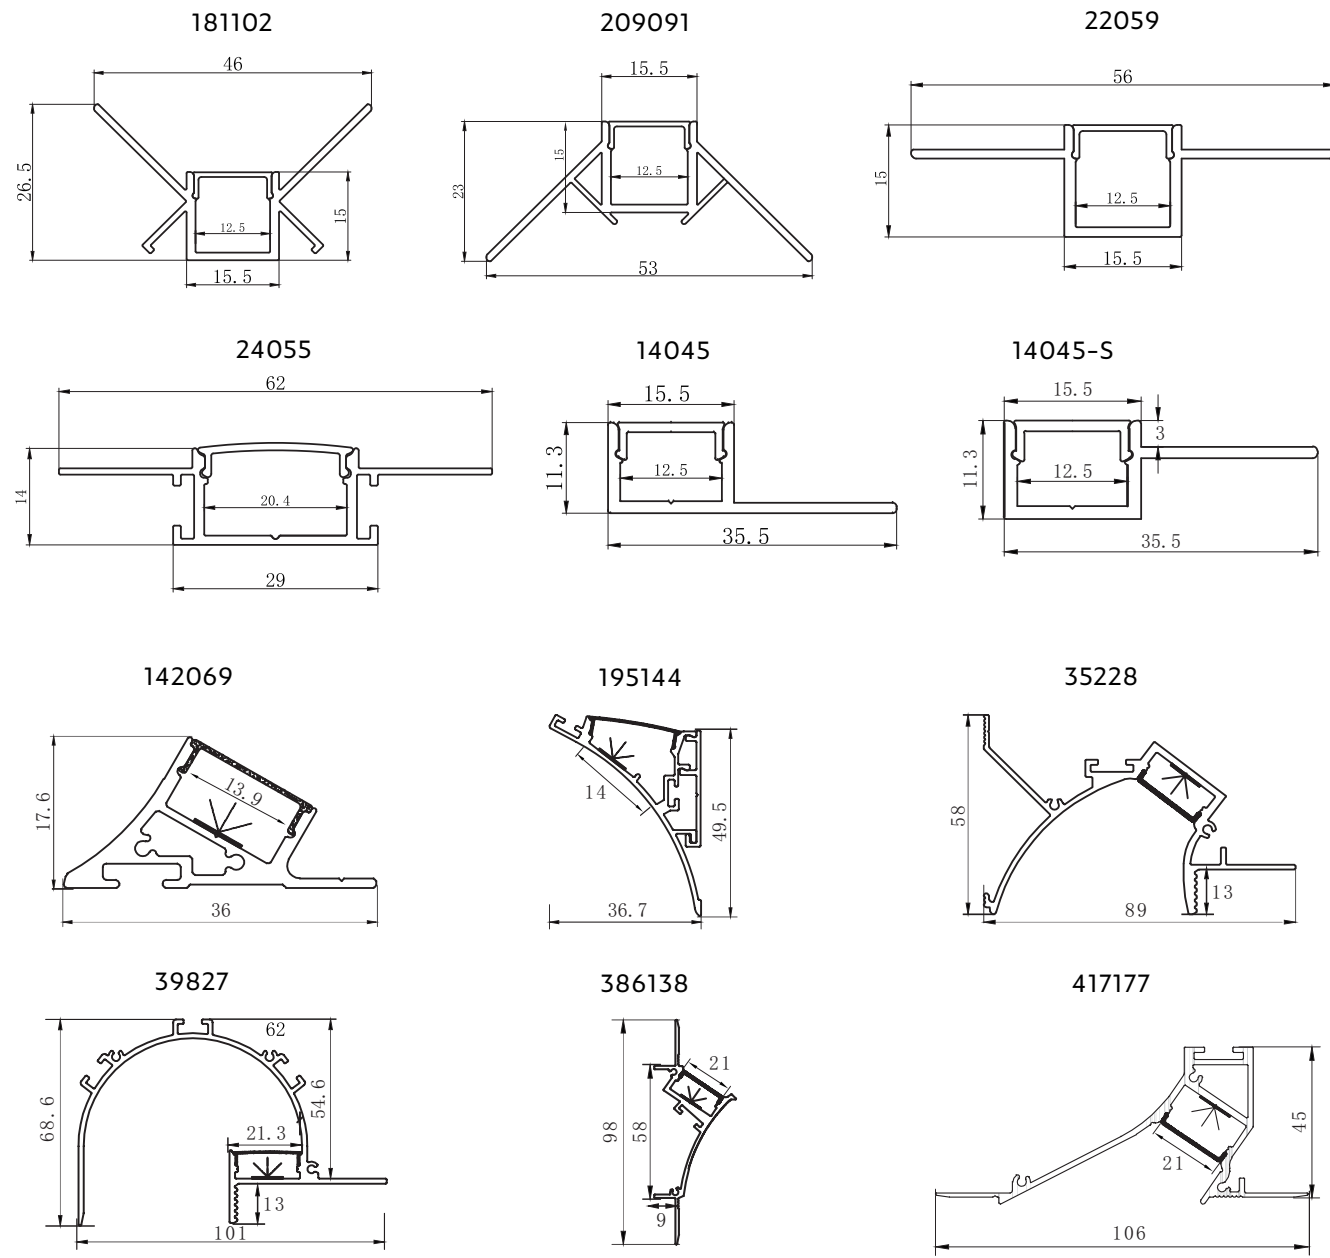

Part # AL-DS-xxxx

## Office Suspension Series


(Unit: mm)

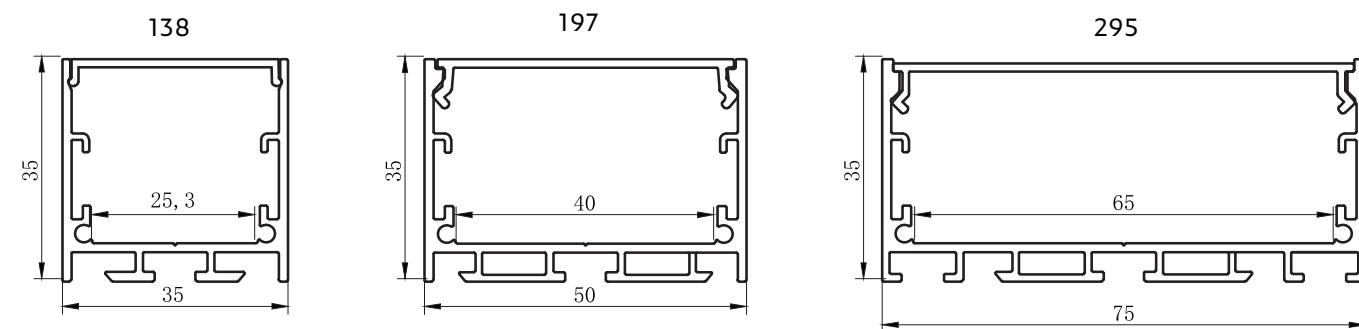

Part # AL-OSS-xxx

## Office Recessed Mounting Series


(Unit: mm)

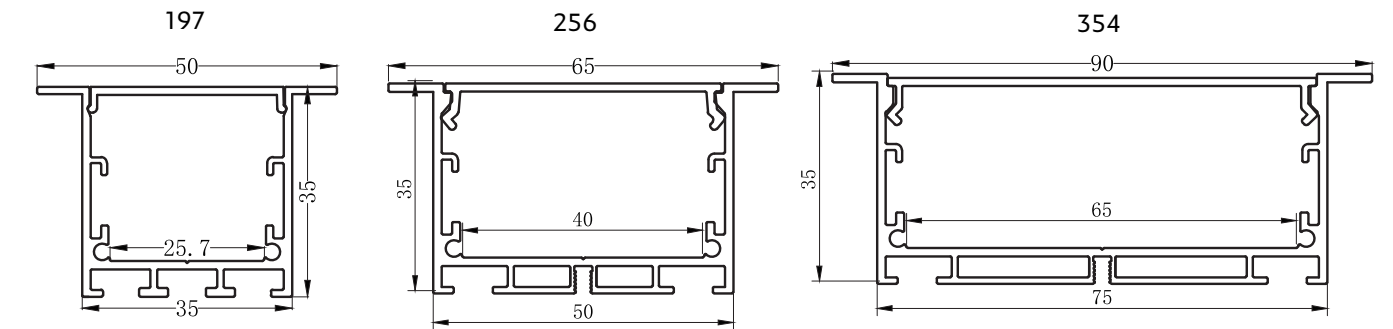

Part # AL-ORMS-xxxx


## Mounting Accessory Series for Waterproof Strip

(Unit: mm)

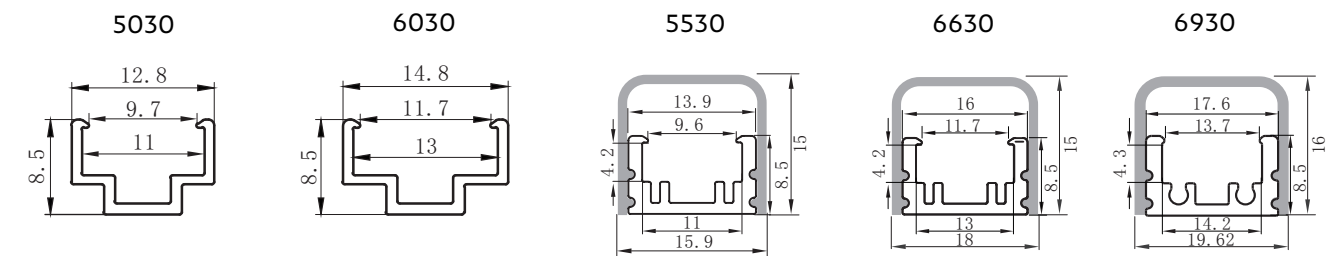

Part # AL-MASW-xxxx

### Aluminum Options

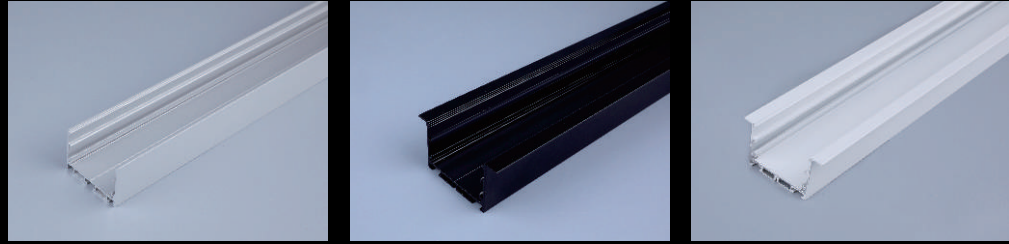


Silver

Black

White

### Diffusion PC Cover Options

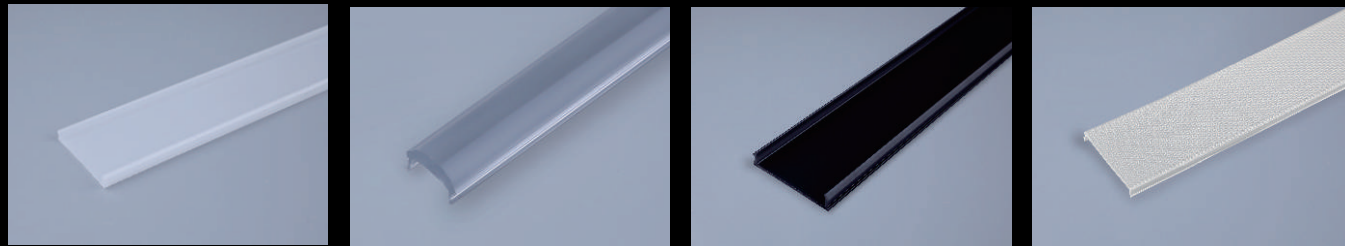

Milky  
Transmission:83%  
%For Dot-free


Transparent  
Transmission:93%  
For High transmittance

Black  
Transmission:60%  
For Decoration

Prismatic  
Transmission:83%  
For Anti-glare UGR < 19 optional

### Length Increment Diagram Illustration


LED Strip



Aluminum Profile+Endcap



LED Strip+Cable+Aluminum Profile+Endcap

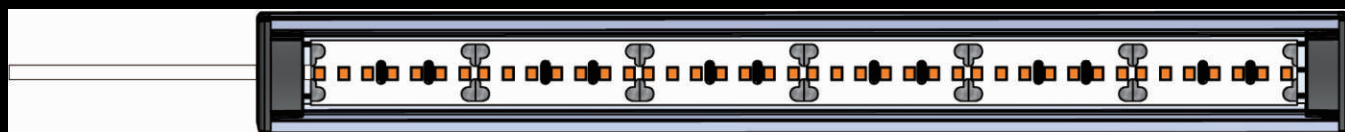

End Cap Length Extra Profile Length

LED Strip Length

Extra Profile Length End Cap Length




Mini Surface Mounting Series

## Mini Surface Mounting Series

(Unit: mm)


**MSM-3951**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 10\*13mm [0.39\*0.51in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]

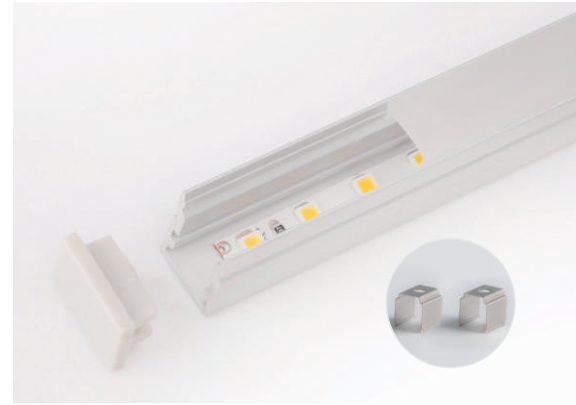


**MSM-0603**



Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 8\*7mm [0.6\*0.3in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

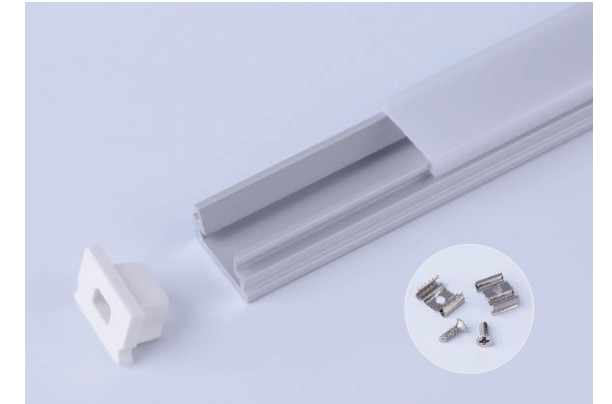


(Unit: mm)



**MSM-0335**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 7.8\*9mm [0.3\*0.35in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]



**MSM-4735**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 12\*9mm [0.47\*0.35in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

**MSM-3939**



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 10\*10mm [0.39\*0.39in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 5mm [0.2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]



Channel and LED Strip Compatability Chart						Mini Surface Mounting Series					Mini Recessed Mounting	
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	MSM-3951	MSM-0335	MSM-3939	MSM-0603	MSM-4735	MRM-6359	MRM-0547
✓			HEFC-9682S	0.2" (5mm)	IP20	✓	✓	✓	✓	✓	✓	✓
✓			ICBI-9645S	0.24" (6mm)	IP20					✓		
✓			ULHE-9519S	0.32" (8mm)	IP20					✓		
✓			ULHE-9522S	0.32" (8mm)	IP20					✓		
✓			HEFC-9687S	0.32" (8mm)	IP20					✓		
✓			OSMV-FE62S	0.32" (8mm)	IP20					✓		
✓			TDFP-414S	0.32" (8mm)	IP54					✓		



Regular Surface Mounting Series

## Regular Surface Mounting Series

(Unit: mm)

RSM-  
6733




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 17.1\*8.5mm [0.67\*0.33in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 240$ LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51 in.]




RSM-  
6351




Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 16\*13mm [0.63\*0.51in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover:  $\geq 120$ LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51 in.]

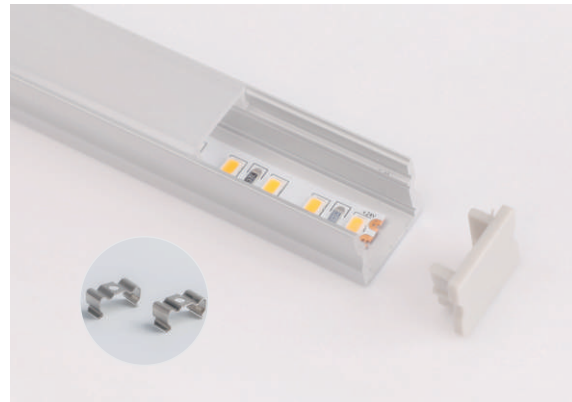

RSM-  
6760




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 17.1\*15.3mm [0.67\*0.6in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120$ LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51 in.]



RSM-  
4759




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 12\*15mm [0.47\*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover:  $\geq 120$ LED/M/Row [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+25mm [0.981 in.]

RSM-  
5928



Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 15.9\*7mm [0.59\*0.28in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover:  $\geq 240$ LED/M/Row [73LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51 in.]



RSM-  
9354



Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 23.5\*13.6mm [0.93\*0.54in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover:  $\geq 120$ LED/M [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51 in.]




## Regular Surface Mounting Series

(Unit: mm )

RSM-  
6759




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 17.1\*15mm [0.67\*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]





RSM-  
7679-B




Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 19.4\*20mm [0.76\*0.79in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

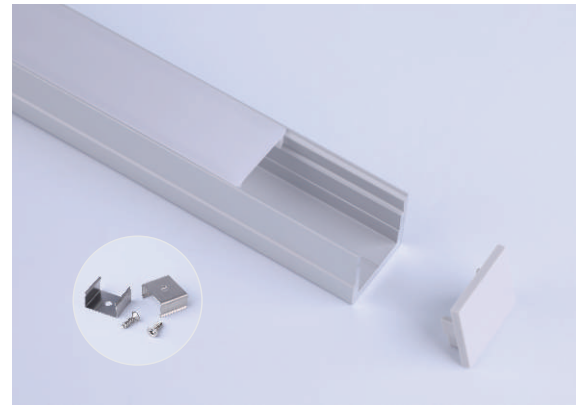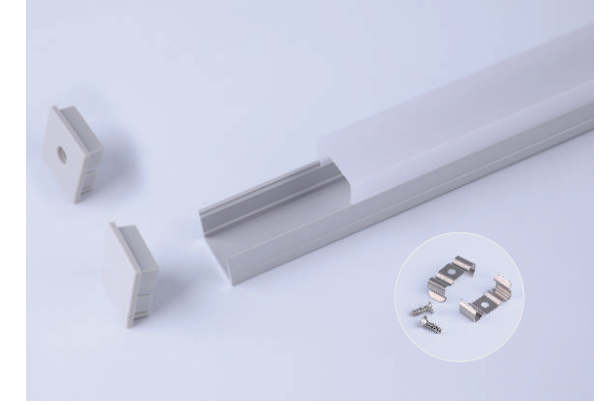

RSM-  
6760



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 17\*15mm [0.67\*0.6in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]


RSM-  
7679-A



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 19.4\*20mm [0.76\*0.79in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]

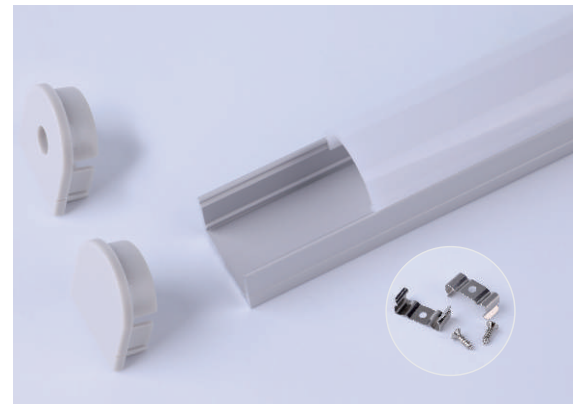




Regular Recessed Mounting Series

## Regular Recessed Mounting Series

(Unit: mm )

**RRM-9831**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 25\*8.0mm [0.98\*0.31in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 240\text{LED/M/Row}$  [73LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+22mm [0.87in.]



**RRM-9860**




Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 25\*15.3mm [0.98\*0.6in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+22mm [0.87in.]


**RRM-8367**



Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 21\*17mm [0.83\*0.67in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+18mm [0.71in.]

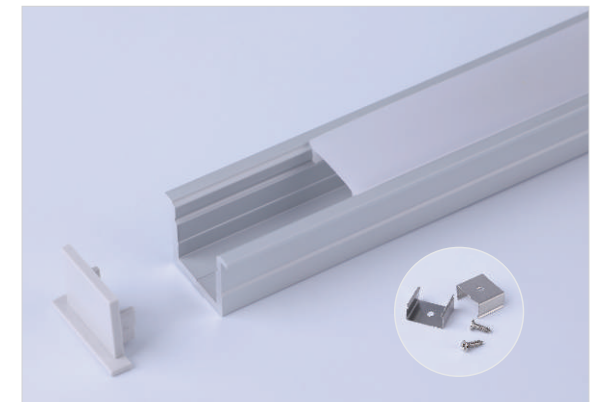


## Regular Recessed Mounting Series

(Unit: mm)

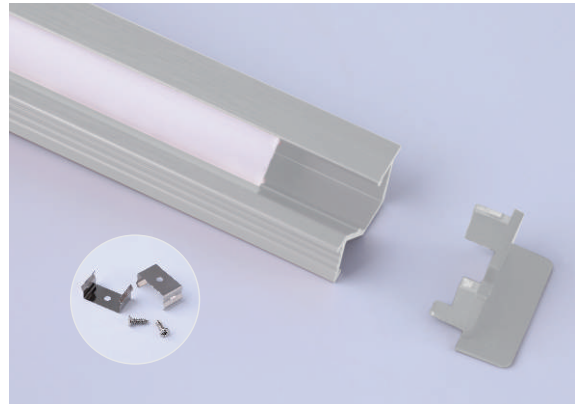

RRM-  
9447



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 24\*12mm [0.94\*0.47in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8mm [0.31in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED}/\text{M}/\text{Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+28mm [1.1in.]



Channel and LED Strip Compatibility Chart						Regular Surface Mounting								Regular Recessed Mounting				
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RSM-6733	RSM-6760	RSM-5928	RSM-6351	RSM-4759	RSM-9354	RSM-6759	RSM-6760A	RSM-7679-A	RRM-9831	RRM-9860	RRM-8367	RRM-9447
✓			HEFC-9682S	0.2" (5mm)	IP20													
✓			ICBI-9645S	0.24" (6mm)	IP20													
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	
	✓		PCS-FE70S	0.39" (10mm)	IP67	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			OSMV-FE62S	0.39" (10mm)	IP65	✓	✓	✓				✓	✓	✓	✓	✓	✓	
			SRLT-FK76S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			TDFP-468S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			TDFP-172S	0.39" (10mm)	IP67 +	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓				✓	✓	✓	✓	✓	✓	
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓				✓	✓	✓	✓	✓	✓	✓	
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓				✓	✓	✓	✓	✓	✓	✓	
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓					✓	✓	✓	✓	✓	✓	✓	




Corner Mounting Series

## Corner Mounting Series

(Unit: mm )

**CM-6363-S**



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 16\*16mm [0.63\*0.63in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]



**CM-6363-R**



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 16\*16mm [0.63\*0.63in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10mm [0.31/0.39in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]

**CM-7272**



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 18.4\*18.4mm [0.72\*0.72in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 240\text{LED/M/Row}$  [73LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+14mm [0.55in.]



Channel and LED Strip Compatability Chart						Corner Mounting		
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RS-80106-R	RS-80106-S	RS-118
✓			HEFC-9682S	0.2" (5mm)	IP20			
✓			ICBI-9645S	0.24" (6mm)	IP20			
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	




Regular Suspension Series

# Regular Suspension Series

(Unit: mm)


**RS-80106-R**



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 20.3\*27mm [0.8\*1.06in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED}/\text{M}/\text{Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]



**RS-80106-S**



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 20.3\*27mm [0.8\*1.06in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 12/15mm [0.47/0.59in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED}/\text{M}/\text{Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]



**RS-118**





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height:  $\varnothing 30\text{mm}$  [ $\varnothing 1.18\text{in.}$ ]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED}/\text{M}/\text{Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

Channel and LED Strip Compatibility Chart						Corner Mounting		
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	RS-80106-R	RS-80106-S	RS-118
✓			HEFC-9682S	0.2" (5mm)	IP20			
✓			ICBI-9645S	0.24" (6mm)	IP20			
✓			ULHE-9519S	0.32" (8mm)	IP20			✓
✓			ULHE-9522S	0.32" (8mm)	IP20			✓
✓			HEFC-9687S	0.32" (8mm)	IP20			✓
✓			OSMV-FE62S	0.32" (8mm)	IP20			✓
✓			TDFP-414S	0.32" (8mm)	IP54			✓
✓			ULPS-9033S	0.39" (10mm)	IP20			✓
✓			HEFC-9677S	0.39" (10mm)	IP20			✓
✓			ULHE-9561S	0.39" (10mm)	IP20			✓
✓			HEP-L624S	0.39" (10mm)	IP20			✓
	✓		CMLP-9688S	0.39" (10mm)	IP20			✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20			✓
		✓	HEFC-9678S	0.39" (10mm)	IP20			✓
	✓		PCS-FE70S	0.39" (10mm)	IP67	✓	✓	✓
✓			OSMV-FE62S	0.39" (10mm)	IP65	✓	✓	✓
			SRLT-FK76S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			TDFP-468S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			TDFP-172S	0.39" (10mm)	IP67 +	✓	✓	✓
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68	✓	✓	✓

## In Ground Series

(Unit: mm)

IG-  
84102



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 21.3\*26.0mm [0.84\*1.02in.]
- Max. Length: Profile 3M [9.84ft.], cover 3M [9.84ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 20-30%
- Length of Finished Product: Strip Length + 13mm [0.51in.]




In Ground Series

## Wall Washer Series

(Unit: mm)


WW-  
1970



Installation Diagram




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 48.5\*17.7mm [1.9\*0.7in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]

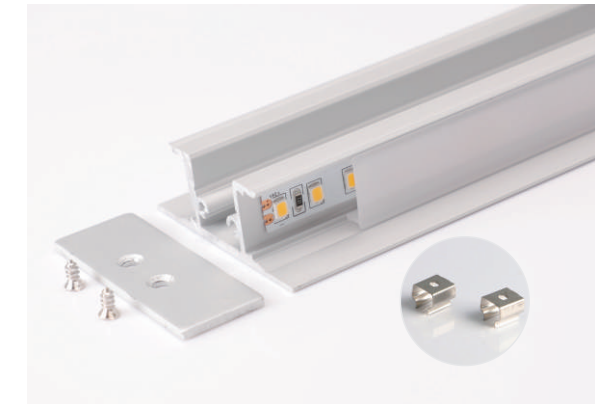

Wall Washer Series

Channel and LED Strip Compatibility Chart						Corner Mounting	
STATIC	RGBW	TW	TSLC Tape Family	PRODUCT WIDTH	IP rating	IG-84102	WW-1970
✓			HEFC-9682S	0.2" (5mm)	IP20		
✓			ICBI-9645S	0.24" (6mm)	IP20		
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓
	✓		PCS-FE70S	0.39" (10mm)	IP67		
✓			OSMV-FE62S	0.39" (10mm)	IP65		
			SRLT-FK76S	0.39" (10mm)	IP67 +		
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +		
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +		
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +		
✓			TDFP-468S	0.39" (10mm)	IP67 +		
✓			TDFP-172S	0.39" (10mm)	IP67 +		
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68		
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68		
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68		

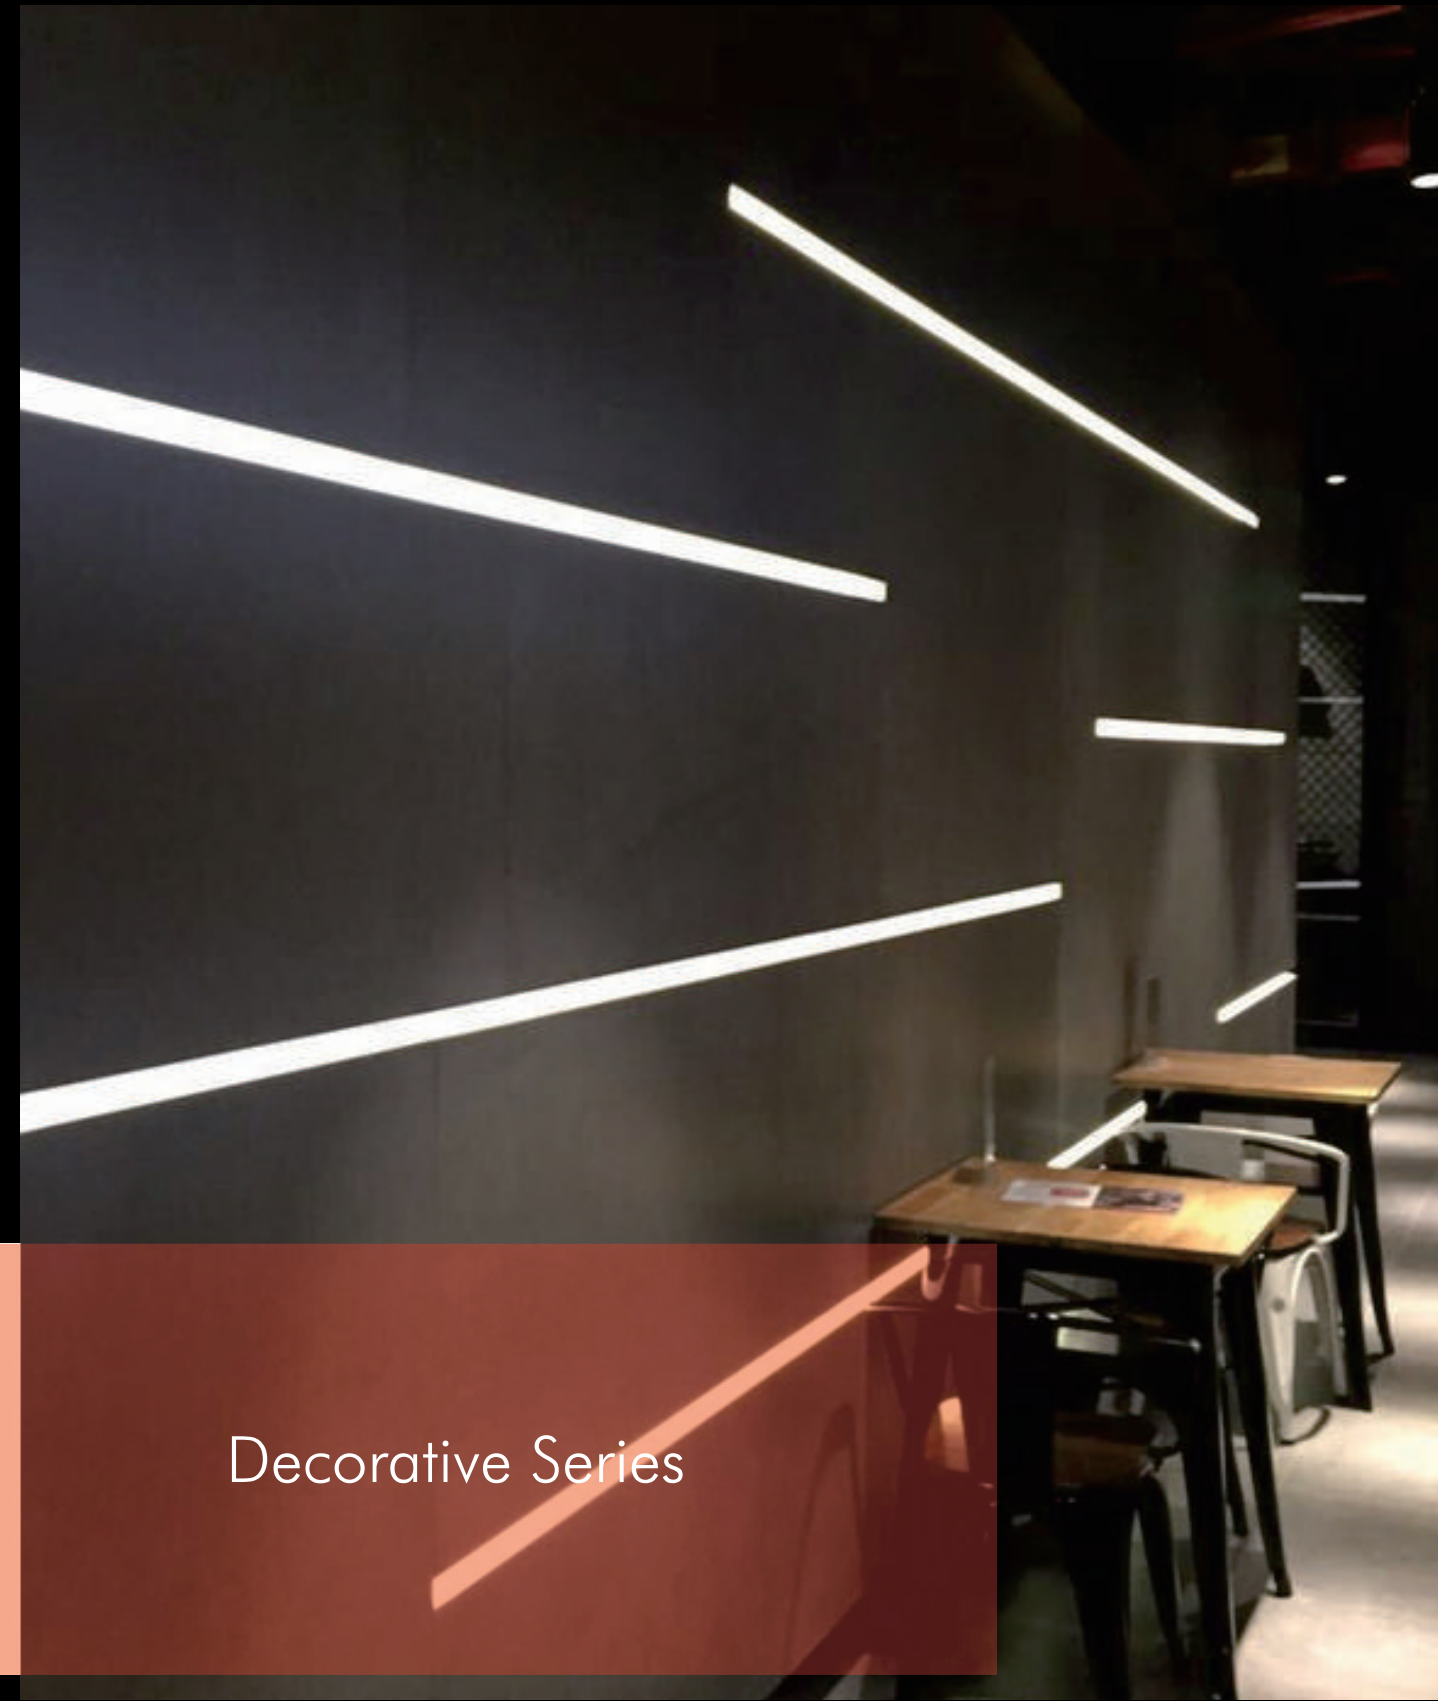


Decorative Series


# Decorative Series

(Unit: mm)



D-  
181102



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 46\*26mm [1.81\*1.02in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51in.]

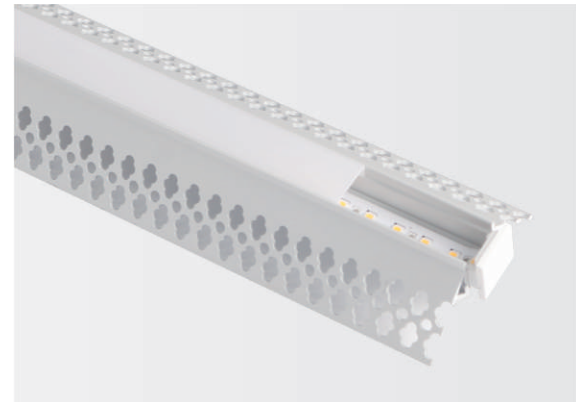

D-  
209091





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 53\*23mm [2.09\*0.91in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+13mm [0.51in.]

# Decorative Series



(Unit: mm)



D-  
22059





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 56\*15mm [2.2\*0.59in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]



## D-22059-SB Optional Side Bendable Version

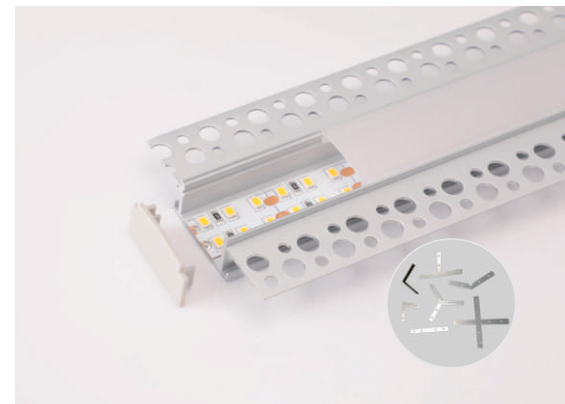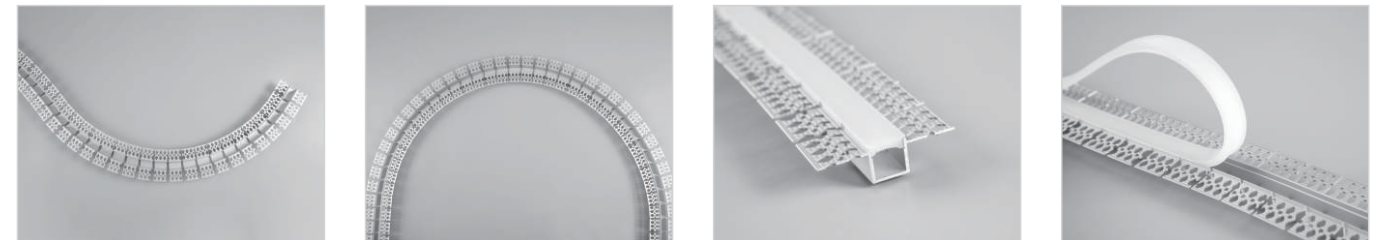


D-  
24055





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 62\*14mm [2.44\*0.55in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw:
- Match Strip Width: 15/20mm [0.59/0.79in.]2-rows
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 60-70%
- Length of Finished Product: Strip Length+13mm [0.51in.]

## D-24055-SB Optional Side Bendable Version

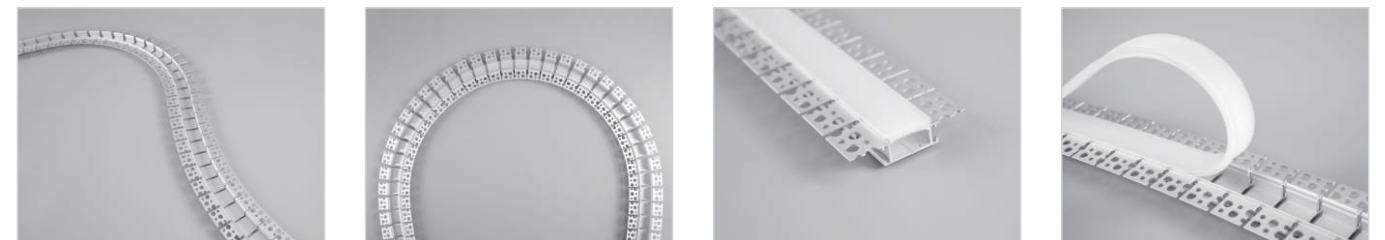


D-  
14045





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 35.5\*11.3mm [1.4\*0.45in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]




D-14045-SB Optional Side Bendable Version

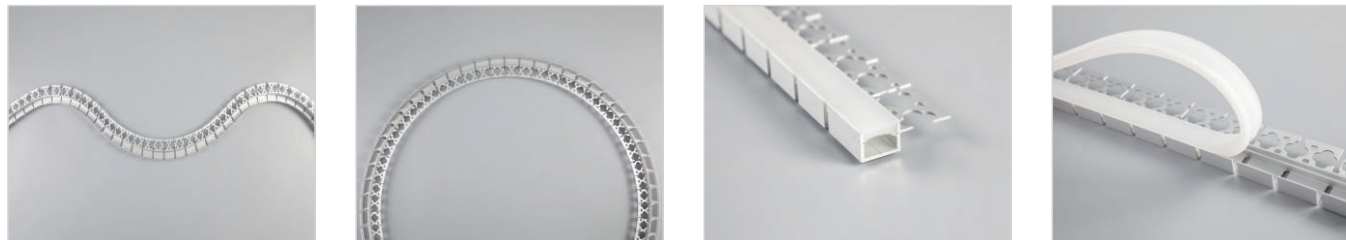


D-  
14045-S



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 35.5\*11.3mm [1.4\*0.45in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 30-40%
- Length of Finished Product: Strip Length+ 14mm [0.55in.]

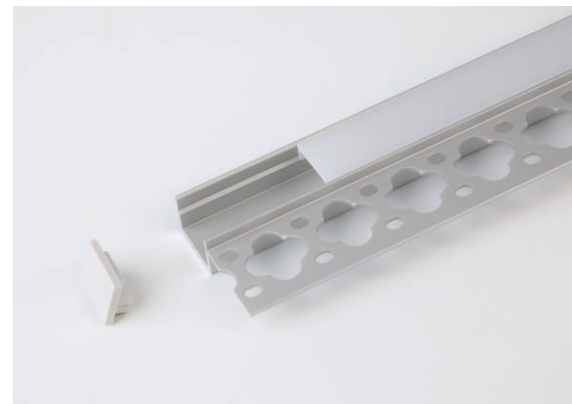


D-  
142069



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 36\*17.6mm [1.42\*0.69in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]





D-  
195144



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 49.5\*36.7mm [1.95\*1.44in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]

D-  
35228




- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 89\*58mm [3.5\*2.28in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+ 13mm [0.51in.]




# Decorative Series

(Unit: mm)



D-  
39827



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 101\*68.6mm [3.98\*2.7in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]


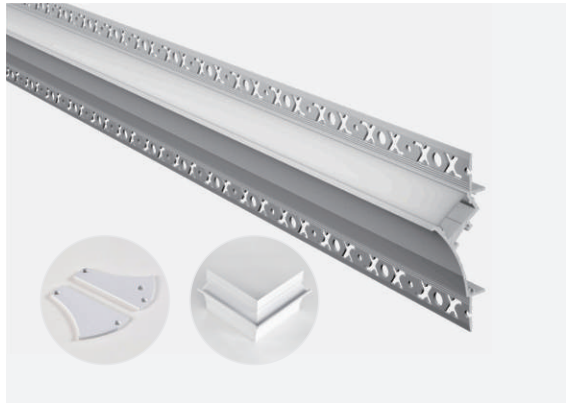


D-  
386138



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 98\*35mm [3.86\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]

D-  
417177



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 106\*45mm [4.17\*1.77in.]
- Max. Length: Profile 10M [32.8ft.], cover 20M [65.6ft.]
- End cap: 2pcs/unit (1pc with hole, 1pc without hole)
- Clip/Screw:
- Match Strip Width: 8/10/12mm [0.31/0.39/0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]



Channel and LED Strip Compatability Chart						Decorative										
STATIC	RGBW	TW	LED STRIP #	PRODUCT WIDTH	IP rating	D-181102	D-209091	D-22059	D14045	D14045-S	D-142069	D-195144	D-35228	D-39827	D386138	D417177
✓			HEFC-9682S	0.2" (5mm)	IP20											
✓			ICBI-9645S	0.24" (6mm)	IP20											
✓			ULHE-9519S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9522S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9687S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			OSMV-FE62S	0.32" (8mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			TDFP-414S	0.32" (8mm)	IP54	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULPS-9033S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEFC-9677S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			ULHE-9561S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEP-L624S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-9688S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	TUNE-LN28S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	HEFC-9678S	0.39" (10mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		PCS-FE70S	0.39" (10mm)	IP67											
✓			OSMV-FE62S	0.39" (10mm)	IP65											
			SRLT-FK76S	0.39" (10mm)	IP67 +											
✓			HEHD-4LD97S	0.39" (10mm)	IP67 +											
✓			HEHD-8LD97S	0.39" (10mm)	IP67 +											
✓			HEHD-15LD97S	0.39" (10mm)	IP67 +											
✓			TDFP-468S	0.39" (10mm)	IP67 +											
✓			TDFP-172S	0.39" (10mm)	IP67 +											
✓			ULHE-9519S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			ULHE-9522S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			HEFC-9687S	0.39" (10mm)	IP65/ IP67plus/ IP68											
✓			ULHE-9561S	0.47" (12mm)	IP65/ IP67plus/ IP68											
✓			ULPS-LN21S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
		✓	DTWP-LN27S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-8707S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
			CMLP-FE78S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	✓		CMLP-9023S	0.47" (12mm)	IP20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
✓			HEPS-L642S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									
✓			HEFC-9677S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									
✓			ULPS-9033S	0.47" (12mm)	IP65/ IP67plus/ IP68		✓									




## Office Suspension Series

## Office Suspension Series

(Unit: mm)

**OS-138**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 35\*35mm [1.38\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15/20mm [0.59/0.79in.]2-rows
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]



**OS-197**




Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 50\*35mm [1.97\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15\*2/20/25mm [0.59\*2/0.79/0.98in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+13mm [0.51in.]



**OS-295**



Installation Diagram



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 75\*35mm [2.95\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15\*3/20\*2/25\*2mm[0.59\*3/0.79\*2/0.98\*2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+13mm [0.51in.]







# Office Recessed Mounting Series



## Office Recessed Mounting Series

(Unit: mm )



### ORM-197



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 50\*35mm [1.97\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M[65.6ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15/20mm [0.59/0.79in.] 2-rows
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+20mm [0.79in.]




### ORM-256



- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 65\*35mm [2.56\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15\*2/20/25mm [0.59\*2/0.79/0.98in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 40-50%
- Length of Finished Product: Strip Length+30mm [1.18in.]

### ORM-354





- Material: Anodized Aluminum 6063
- Color: Silver / Black / White
- Cover: Regular PC diffuser (milky / transparent / black)
- Width\*Height: 90\*35mm [3.54\*1.38in.]
- Max. Length: Profile 3M [9.84ft.], cover 10M [32.8ft.]
- End cap: 2pcs/unit (1 pc with hole, 1 pc without hole)
- Clip/Screw: 2pcs/M [2pcs/39.4in.]
- Match Strip Width: 15\*3/20\*3/25\*2mm [0.59\*4/0.79\*3/0.98\*2in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 50-60%
- Length of Finished Product: Strip Length+30mm [1.18in.]



## Mounting Accessory Series for Waterproof Strip

(Unit: mm)

**MAWS-5030**



Material: Anodized Aluminum 6063

Color: Silver / Black / White

Cover: /

Width\*Height: 12.8\*8.5mm [0.5\*0.3in.]

Max. Length: Profile 3M [9.84ft.]

End cap: /


Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 10mm [0.4in.]



Linear LED Density@milky cover: /

Light Output Rate of Finished Product: Same as Strip

Length of Finished Product: Same as Strip

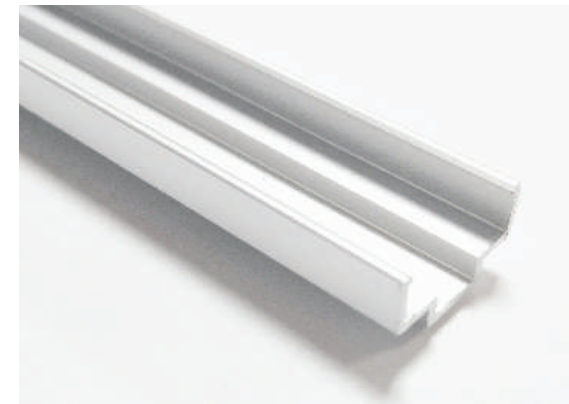

**MAWS-6030**



Material: Anodized Aluminum 6063

Color: Silver / Black / White

Cover: /

Width\*Height: 14.8\*8.5mm [0.6\*0.3in.]

Max. Length: Profile 3M [9.84ft.]

End cap: /



Clip/Screw: 3pcs/M [3pcs/39.4in.]

Match Strip Width: Waterproof strip in 12mm [0.47in.]

Linear LED Density@milky cover: /

Light Output Rate of Finished Product: Same as Strip

Length of Finished Product: Same as Strip

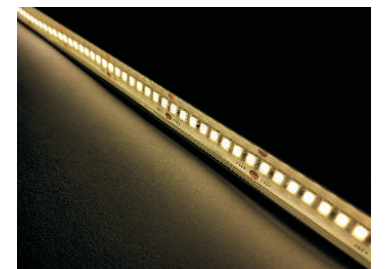
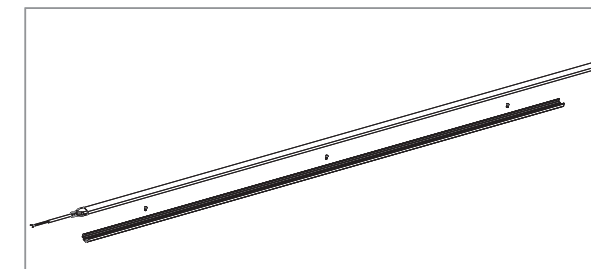


Mounting Accessory Series for Waterproof Strip

# Mounting Accessory Series for Waterproof Strip

(Unit: mm)



**MAWS-5530**




- Material: Anodized Aluminum 6063
- Color: Silver
- Cover: Regular PC diffuser (milky)
- Width\*Height: 13.9\*8.5mm [0.55\*0.3in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: /
- Clip/Screw: 3pcs/M [3pcs/39.4in.]
- Match Strip Width: Waterproof strip in 10mm [0.4in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Same as Strip





**MAWS-6330**




- Material: Anodized Aluminum 6063
- Color: Silver
- Cover: Regular PC diffuser (milky)
- Width\*Height: 16\*8.5mm [0.63\*0.3in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: /
- Clip/Screw: 3pcs/M [3pcs/39.4in.]
- Match Strip Width: Waterproof strip in 12mm [0.47in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Same as Strip

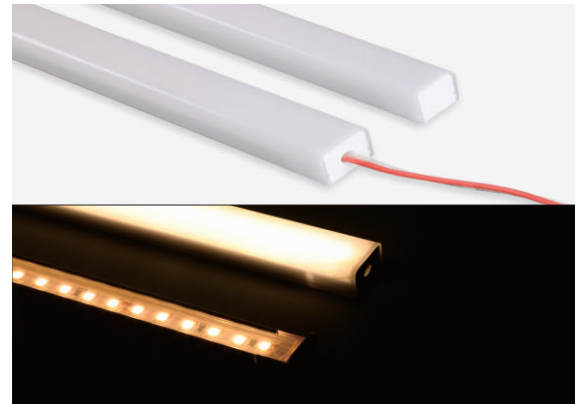

**MAWS-6930**



- Material: Anodized Aluminum 6063
- Color: Silver
- Cover: Regular PC diffuser (milky)
- Width\*Height: 17.6\*8.5mm [0.69\*0.3in.]
- Max. Length: Profile 3M [9.84ft.], cover 20M [65.6ft.]
- End cap: /
- Clip/Screw: 3pcs/M [3pcs/39.4in.]
- Match Strip Width: Waterproof strip in 14mm [0.55in.]
- Linear LED Density@milky cover:  $\geq 120\text{LED/M/Row}$  [36LED/ft.]
- Light Output Rate of Finished Product: 70-80%
- Length of Finished Product: Same as Strip

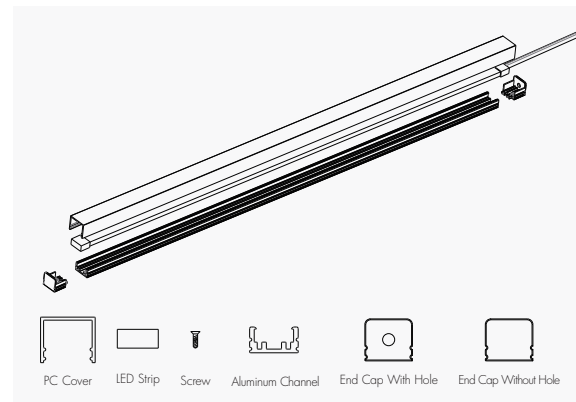

1731 Kaiser Ave. Irvine, CA 92614 | [sales@thesmartlightingcompany.com](mailto:sales@thesmartlightingcompany.com) | 949.346.3456 | [thesmartlightingcompany.com](http://thesmartlightingcompany.com)  
© 2021 The Smart Lighting Company. All rights reserved. Specifications subject to change without notice. Rev.08/24

