


# MLB-EL90U

INGROUND LANDSCAPE LIGHT  
 12w / 721lm

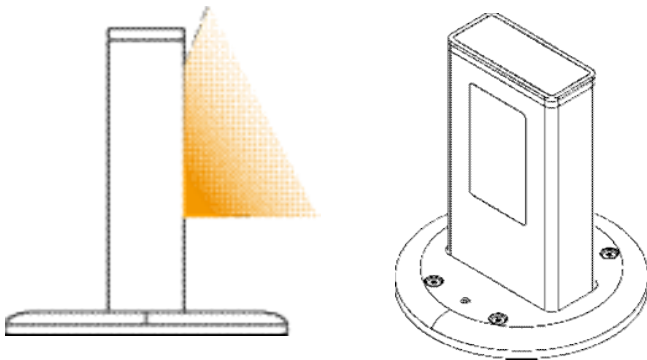

## MOTORIZED RETRACTABLE LIGHT

Wall-wash Lighting | Accent Lighting

Imagine a world where your landscape lights rise at dusk to beautifully illuminate your pathways, gardens, or architecture—then disappear by dawn, leaving no visual clutter.

Introducing the first-ever motorized retractable landscape light, engineered for both form and function. Perfect for landscape architects, lighting designers, and maintenance teams seeking innovation with elegance.

Our retractable motorized Landscape Light is perfect for pathway and area lighting. 120° light distribution. Multiple color temperatures are available. 4 levels of brightness are able to be selected once powered.

When powered on, the fixture raises to max height and when powered off, fixture retracts to be flush with ground level. Works with standard 12vac landscape transformer.

### Features:

- *Extruded aluminum housing & stainless steel*
- *Single-sided upward lighting*
- *120° wide beam angle*
- *Polycarbonate clear Lens*
- *4 brightness levels available for adjustment*
- *IP66 Waterproof*
- *Winter mode setting*
- *CCT Options : 2700K / 3000K / 4000K / 5000K*
- *5 Year Warranty*


Diameter	1.6" x 3.5"
Raised Height	6"
Wattage (Max.)	12w
Input Voltage	AC10-18V

# MLB-EL90U



## SPECIFICATIONS

Date: .....  
Type: .....  
Project: .....  
Firm: .....

## PROFILE

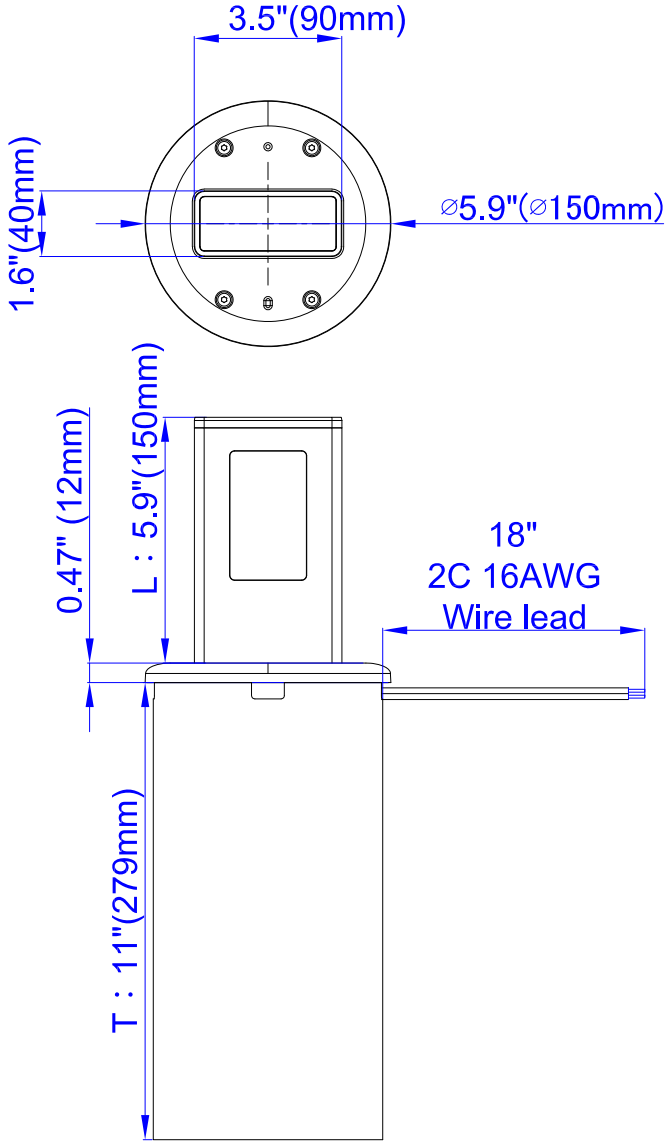

MLB-EL90US-6-xx-xxD

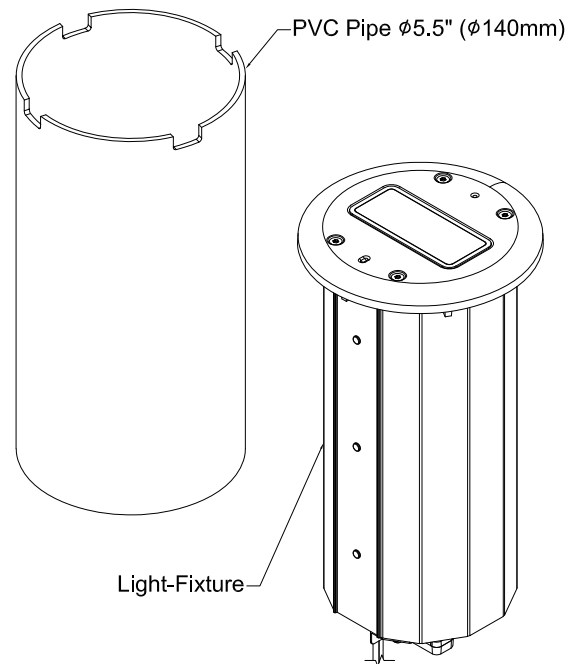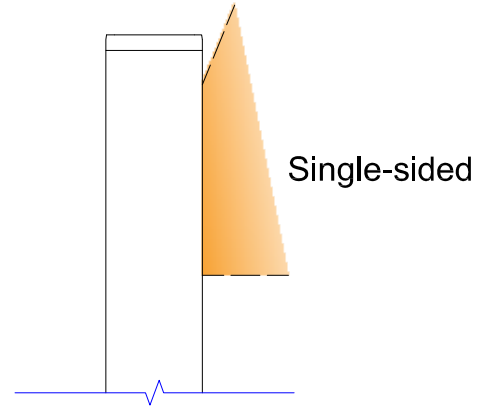

# MLB-EL90U

## SPECIFICATIONS

Date: .....

Type: .....

Project: .....

Firm: .....

### MLB-EL90U- 120° Illumination

Physical		
		MLB-EL90U-6-xxK-120D
Light Fixture		
Material		Stainless Steel & Extruded Aluminum
Finishing		Powder Coated Black
Dimensions		3.5" x 1.6" (90mm x 40mm)
Raised Height		5.9" (150mm)
Environment		IP66
Lens		Polycarbonate Clear Lens
Fixture Base		
Material		Extruded Aluminum & PVC Pipe
Pipe Diameter		Ø5.5" (Ø140mm)
Pipe Height		11" (279mm)
Installation Recommended Hole Size	Diameter	Ø7.9" (Ø200mm)
	Depth	13" (330mm)

Performance	
Color Temperature Options	2700K , 3000K , 4000K , 5000K
Beam Angle	120°
Lumen Output	721 lm @3000K
Adjustable Brightness	4 brightness levels available for adjustment
Operating Temperature	0°C to +50°C, 32°F to 122°F

Electrical	
Input Voltage	AC10-18V
Power Consumption	12w/pc.
	*The light consumes a maximum of 12W when it is rising up while powered on.

# MLB-EL90U

## ORDER FORM

Date: .....

Type: .....

Project: .....

Firm: .....

### CREATE YOUR FIXTURE

MLB-EL90U-xx"-xxK-120D

#### MODEL

MLB-EL90U

#### RAISED HEIGHT

6"

6 inches

#### COLOR

27k

30k

40k

50k

2700k

3000k

4000k

5000k

#### BEAM

120

120°